

ascent[▲]

reach for the sky



v341
English
Instructions

1. Contents:

ascent[^]


Thanks!	2	Care	23
Safety.....	3	Specifications	24
Battery	4	License	25
Overview	5	Warranty	26
Turning On	6	Contact.....	27
Fly	7		
Fly Mode	8		
Log Book	9		
Log Book Details.....	10		
Settings	11		
Altimeter	12		
Units	13		
Flight	14		
Sink Alarm	15		
Beep	16		
Date & Time.....	17		
Watch	18		
Memory	19		
Info	20		
About	21		
Computer	22		

2. Thanks!

ascent[^]

Thank you for your purchase of the Ascent wrist-mounted vario. This product was designed by engineers who also happen to be paragliding pilots. We wanted a product that would meet the following criteria:

- Small
- Light Weight
- Easy to Operate



There was nothing currently available that satisfies each requirement so we sat down, rolled up our sleeves, and after many hours of hard work, prototype builds, programming, reliability testing, and test flights came up with what we believe is the best small, rechargeable variometer available.

We know that you will enjoy this product and wish you many safe and enjoyable flights.

Thank you again for your purchase.
Ascent Products

3. Safety Information

ascent[^]

Warning; This product is not intended to be used as a precise measurement of altitude, vertical speed, or temperature.

Warning; This product contains a Lithium-ion rechargeable battery. The product must be disposed of properly. Use only in accordance with operating instructions.


Warning; This product and its components contain chemicals known to the State of California to cause cancer and birth defects, or reproductive harm. This notice is being provided in accordance with California Proposition 65. If you have further questions please contact Ascent Products.

4. Charging the Battery


ascent[^]

Your vario operates on a rechargeable lithium-polymer battery. The battery has up to 10 hours flight time or 6 months standby time when fully charged using the default settings. The beep volume and duration have a noticeable effect on battery life with louder and longer beeps requiring more power and reducing battery life.

To charge the battery, plug the mini-USB end of the cable into the product and plug the other end into the AC wall charger, car charger, or computer. The screen will briefly display "charging", and the icon on the info screen will be animated.

If the battery becomes critically low during use, " Low Bat" will appear at the top of the screen and the volume will be muted until the unit is recharged.

The product takes less than 2 hours to fully charge. When fully charged, the icon on the info screen will show full. Lithium-polymer batteries do not have a memory and there is no advantage to letting the unit run completely out of power prior to charging. Therefore you are advised to keep the unit fully charged so that it is ready to use when you are ready to fly.

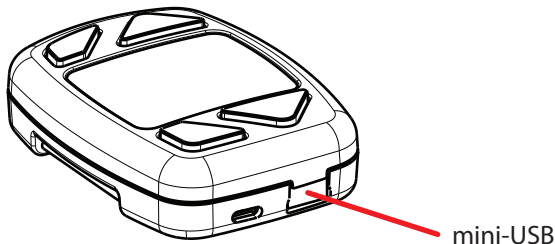


5. Product Overview

ascent[^]

To get the most out of your new product we recommend that you read the entire manual. However, we believe that once you start using the menus you will find the operation of the product easy and intuitive.

The product has four push buttons for navigation and adjustment as shown below.

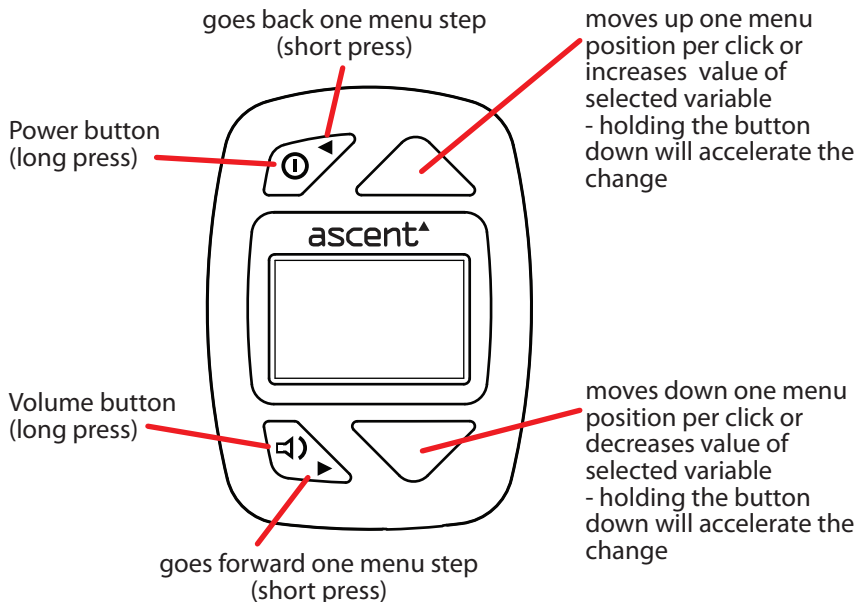


6. Turning the vario on and off

ascent[^]

To extend the battery life, after 10 minutes of inactivity the vario automatically enters the sleep mode to conserve battery power and briefly displays the current time as shown below. It will not fall asleep in the fly mode. While asleep, pressing any button briefly will display the time for a few seconds. If the time does not display, the battery is discharged. In this case, recharge the battery and reset the time and date (under settings).




Sleep Mode - This screen displays the time.



Press and hold the **I** button for 2 seconds to wake up the product to the main menu.

You can also press the **I** button for 2 seconds at any time to put the unit in the sleep mode or simply let it fall asleep again.



Main Menu - This screen has four options: Fly, Log Book, Settings, and Info. Use the **▲** and **▼** buttons to highlight your choice and press the **▶** button to select.


7. Starting and Ending a Flight

ascent[^]

Use the ▲ and ▼ buttons to highlight Fly and then push the ► button to enter Fly Mode. When the unit enters Fly Mode it will beep to indicate the current volume setting. The unit will begin recording the flight after a specified change in altitude. This threshold altitude can be adjust in the “Settings” menu.




Main Menu



Press the ► button to enter “Fly” mode

Press and hold the ◀ button for 2 seconds to end the flight and exit “Fly” mode.



Fly Mode - This screen displays the absolute altitude as indicated by the “Abs” (or relative altitude as indicated by “Rel” if selected in the Settings menu). The screen also displays the current averaged vertical speed (default = 5 seconds).

8. Fly Mode



ascent[^]

By briefly pressing any of the four buttons during the flight, the screen will temporarily display other flight information for 5 seconds and then return to the default screen. Remember a long press of the **ⓘ** button will exit the Flight Mode completely and stop the recording of flight data.




Press the **◀** button to view the current time & flight duration.

Briefly Press the **↔** button to change the "Volume" during a flight. Then use the **▲** and **▼** buttons to adjust the volume.




Note: if the main fly screen is set to relative altitude then this screen will display the absolute altitude and temperature.



Press the **▲** button to view the maximum altitude and maximum averaged vertical speed so far this flight.

Press the **▼** button to view the current relative altitude and current temperature.




9. Viewing the Log Book

ascent[^]

Use the ▲ and ▼ buttons to highlight Log Book and then push the ► button to enter the Log Book. This unit can store summary data for 200 flights. Pushing the ▲ and ▼ buttons will scroll through the recorded flights. Pressing the ► button will allow you to see additional flight details as described on the next page. The data in the log book will be saved, even if the battery is completely discharged or the unit is reset.



Main Menu



Press the ► button to enter the Log Book

Press the ◀ button at any time to exit the Log Book




Log Book - This is the first page you will see when entering the log book. It displays the flight number, date, launch time, and duration of the flight. Note that the flight data starts recording after a preset (default=5 meter) altitude change has been detected while in flight mode. The unit stops recording flight data when the user exits the flight mode.

10. Log Book Details



ascent[^]

You can view additional information about the flight by pushing the ► button.



flight number
starting altitude
maximum altitude
ending altitude

flight number
maximum 2-second lift
maximum averaged lift (default = 5-seconds)
maximum 2-second sink



flight number
maximum temperature
minimum temperature


11. Settings

ascent[^]


To enter the Settings Menu, highlight Settings on the main menu and press the ► button. All of these settings are saved except for the time and date even if the battery is completely discharged. If this happens you will need to set the time and date.



Main Menu



Press the ► button to enter the Settings Menu




Settings Menu - From this page you can select which category of settings you wish to modify. There are currently eight choices: Altimeter, Units, Flight, Sink Alarm, Beep, Date & Time, Watch, and Memory.

12. Altimeter


ascent[^]

To change a specific value or function, press the ▲ and ▼ buttons to highlight the value, press the ► button to select and use the ▲ and ▼ buttons to adjust. This new value is automatically saved when you press the ◀ button. To select a “radio” button, highlight the value and push the ► button.

Changing the “Mode” from Absolute to Relative changes the default screen on the main Fly mode. The relative altitude is automatically reset to zero for every flight when you first enter the fly mode.



Settings Menu



Press the ► button to enter the Altimeter Menu

Altimeter Options - From this page you can adjust the current altitude, and select the default flight mode display of absolute or relative (to launch).


The vario works by using temperature compensated pressure measurements. Because of this, changes in the weather will affect the displayed values. If you know the altitude of the launch, you can adjust the altitude prior to launching.

13. Units

ascent[^]

To select a “radio” button, highlight the value and push the ► button.


	SI	Imp
altitude	meters	feet
verticalspeed	m/s	ft/min
temperature	celsius	fahrenheit



Settings Menu



Press the ► button to enter the Units Menu




Units - From this page you can choose which units you would like the vario to display.


14. Flight Settings

ascent[▲]


To change a specific value or function, highlight the value and use the ▲ and ▼ buttons to adjust.



Settings Menu



Press the ► button to enter the Flight menu




Flight Settings - From this menu you can choose the vertical speed averaging time which is a value from 1 to 60 seconds (default = 5 seconds). You can also adjust the altitude change required to start recording a flight (default = 5 meters) and whether or not to suppress the beeps prior to crossing this threshold. Beep suppression is on (checked) by default to avoid annoying beeps while standing on launch.


15. Sink Alarm

ascent[^]


To change a specific value or function, press the ► button, highlight the value and use the ▲ and ▼ buttons to adjust.



Settings Menu




Press the ► button to enter the Sink Alarm




Sink Alarm Options - From this page you can turn the sink alarm on or off, and choose the threshold sink velocity. The sink alarm velocity is calculated using a 2-second average.


To change a specific value or function, press the ► button, highlight the value and use the ▲ and ▼ buttons to adjust.



Settings Menu



Press the ► button to enter the Beep Options menu




Beep Options - From this menu you can choose from some preset or user configurable tone options. The Standard and Double beeps have been optimized for performance and long battery life (~10 hours). The Classic may sound more similar to other vario's, however the battery life is reduced (~6 hours). The User beep option can be configured using the Ascent User Control software. Values are entered into the program and then downloaded to the vario.

To change a specific value or function, press the ► button, highlight the value and use the ▲ and ▼ buttons to adjust. It is necessary to set the time and date after charging if the battery was completely discharged.



Settings Menu



Press the ► button to enter the Date & Time




Date & Time - From this page you can set the date and time. This is necessary for your flight to be recorded correctly in the log book. This can also be set by connecting the unit to a computer using the Ascent User Control software.


There are several options to modify the display while displaying the time. These are found under the "WatchMode" in the "Settings" Menu.



Settings Menu



Press the ► button to enter the WatchMode




Watch Mode- From this page you can customize how the "watch" is displayed while in sleep mode. This display can be rotated for right or left handed users, and can be inverted (white numbers on black background).


19. Memory

ascent^


To change a specific value or function, press the ► button, highlight the value and use the ▲ and ▼ buttons to adjust. Note that you must keep scrolling down on the Settings page to reach the Memory setting menu.



Settings Menu



Press the ► button to enter the Memory




Memory - From this page you can view the number of flights logged and the % of memory used. When full, you must clear the log in order to log more flights. To clear the log, press the ► button and use the ▲ and ▼ buttons to select yes and press the ► button again.


To enter the Info screen, highlight "Info" on the main menu and press the ► button.



Main Menu



Press the ► button to enter the Info screen



The info screen will show the current altitude, temperature, date, time, and battery status.


21. About

ascent[^]

To enter the About screen, scroll down past “Info”, highlight “About” on the main menu and press the ► button.



Main Menu



Press the ► button to enter the About screen



The About screen will display the current version of the installed firmware. Updates will be available periodically. If you have the Ascent Control software running on your computer while it is connected to the internet, it will automatically detect and prompt you to download and install the newer version.


22. Connecting to a Computer

ascent[^]

Please visit www.ascentvario.com and download and install the “Ascent User Control” software from the support page. This software currently works only on a Microsoft PC and requires Microsoft.NET and a specific USB driver to run. The Ascent User Control should recognize if your computer is missing this software and prompt you to download it.

Instructions for this software are included with the software under the “Help” menu.

To connect your variometer to a computer plug the micro USB end of the supplied cable into the product. Plug the other end of the cable into a computer USB port.

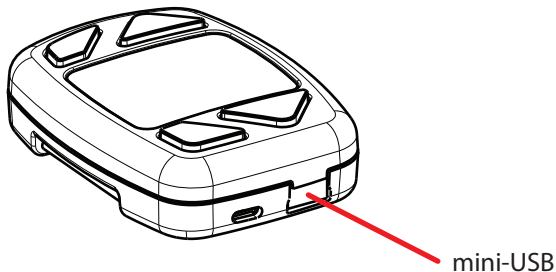

23. Care of Product

ascent[^]

Your product is constructed of high quality materials and does not require maintenance other than cleaning. Clean the product using a soft cloth dampened with a mild detergent solution and then wipe dry. AVOID chemical cleaners and solvents that may damage plastic and braided nylon components.

Do not store the product where prolonged exposure to sun, heat, rain, snow, or extreme cold may result in permanent damage.

Do not store the unit where the buttons can be depressed as this will lead to the battery being drained.

The product is not waterproof so do not immerse it in water.

24. Specifications

ascent[^]

Altimeter:

Temperature corrected, user calibrated altitude
Absolute and Relative (to launch) altitude
Display in meters or feet with 1 meter (1 ft) resolution

Variometer:

Averaged digital display with 0.1 m/s (10 ft/min) resolution
Instantaneous audio adjustable volume
Sink alarm - user selectable threshold (can be easily disabled)

Temperature:

Ambient temperature in Fahrenheit or Celsius with 1 degree resolution

Flight Log :

Automatically records summary data for 200 flights

Display:

Black & White Graphic LCD with 128 x 64 pixel resolution

Battery:

320 mAh rechargeable lithium polymer battery
Up to 10 hours flight time or 6 months standby
Battery charge indicator

Physical Properties:

44mm (1.75") x 60mm (2.36") x 16mm (0.63")
40g (1.41 oz)
PC/ABS housing and velcro wrist strap

25. Software License Agreement



By using you Ascent Products variometer you agree to be bound by the terms and conditions of the following software license agreement.

Ascent Products grants you a limited license to use the software embedded in this device in the normal operation of the product. Title, ownership rights, and intellectual property rights of the software remain Ascent Products.

Your product's software is property of Ascent Products and is protected under the United States copyright laws and international copyright treaties. The structure, organization, and code of the software are valuable trade secrets to Ascent Products and shall remain so. You agree not to decompile or reverse engineer the software to be used in any other way. You agree not to export or re-export the software to any country in violation of the export control laws of the United States.

26. Limited Warranty

ascent[^]

Your Ascent Products vario is warranted to be free of defects in materials or workmanship for one year from the date of purchase. Within this period Ascent Products at its sole option may repair or replace any parts that fail in normal use. These repairs or replacement will be made at no charge to the customer. The customer is responsible for shipping and handling of the item.

The warranty does not cover failures due to abuse, misuse, accident, or unauthorized alterations or repairs.

To obtain warranty service, contact Ascent Products by e-mail at support@ascentvario.com, or by phone at +1-760-536-8799.

Be sure to use the original packaging or wrap the product in bubble wrap and place in a sturdy sealed box. Include a note with your name, address, phone, and a description of the problem and ship to the following address.

Ascent Products
2061 Wright Avenue Suite A4
La Verne, CA 91750

27. Contact Us



For questions or assistance with your vario please contact:

Ascent Products
2061 Wright Avenue Suite A4
La Verne, CA 91750

+1-760-536-8799

www.ascentvario.com

support@ascentvario.com

Please visit our website and download a pdf of the latest users manual

firmware version: v341